


PRODUCT DATA SHEET

wellTEC® Profile SQ-23/23-R

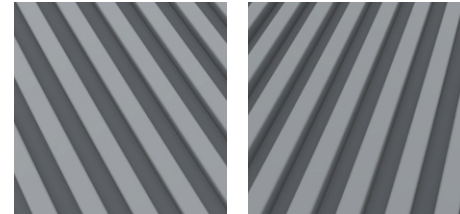

PRECISION &
CREATIVITY

wellTEC®

MN®
METAL & NEW IDEAS.

TECHNICAL DETAILS

GRIDS AND WIDTHS:

Grid 46 mm– Width = 782 mm
 Grid 60 mm– Width = 840 mm
 Grid 70 mm– Width = 910 mm
 Grid 80 mm– Width = 960 mm
 Grid 90 mm– Width = 990 mm
 Grid 100 mm– Width = 1,000 mm
 Grid 120 mm– Width = 1,080 mm
 Grid 140 mm– Width = 1,120 mm
 Grid 160 mm– Width = 1,120 mm
 Grid 200 mm– Width = 1,200 mm
 Other grids or variable grids on request

MOUNTING:

Visible

Connection profiles or sheet material can be supplied on demand.

MATERIALS:

Aluminum (AW-5005) mill finished, normal quality or anodising quality
 Aluminum (AW-3005) coil coated on one side
 Also available in steel, stainless steel, zinc, copper, brass

THICKNESSES:

1.2 mm

LENGTHS:


Up to 5,500 mm

PERFORATIONS ACCORDING TO DIN 24041:

Round holes in staggered rows Rv-1.5/3 approx. 22.68%
 Round holes in staggered rows Rv-2/3 approx. 40.31%
 Round holes in staggered rows Rv-3/4 approx. 51.02%
 Round holes in staggered rows Rv-4/6 approx. 40.31%
 Round holes in staggered rows Rv-5/8 approx. 35.43%

The concrete details and tolerances for your order can be found in our order-related release drawings.

EXAMPLE OF PROFILE CROSS SECTION:

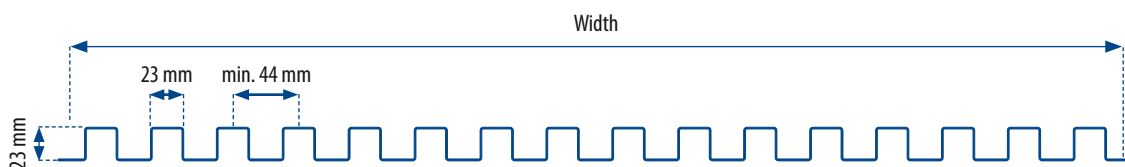

GET IN TOUCH WITH US:

MN Metall GmbH

Industrieweg 34
 D-23730 Neustadt

Tel. +49 (0) 4561/51 79-0
 Fax +49 (0) 4561/51 79-35

E-mail: info@mn-metall.de
 Internet: www.mn-metall.de

MN Metall GmbH – since 1974 the specialist for innovative sheet metal work. We give shape to your ideas!