


PRODUCT DATA SHEET

wellTEC® Profile SQ-12/12-R

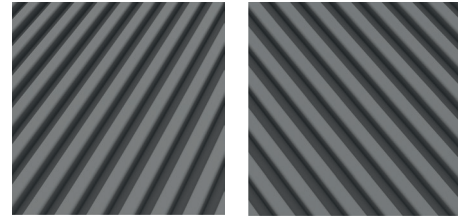

PRECISION &
CREATIVITY

wellTEC®

MN®
METAL & NEW IDEAS.

TECHNICAL DETAILS

GRIDS AND WIDTHS:

Grid 24 mm - width = 840 mm
 Grid 40 mm - width = 1000 mm
 Grid 50 mm - width = 1050 mm
 Grid 60 mm - width = 1080 mm
 Grid 70 mm - width = 1120 mm
 Grid 80 mm - width = 1120 mm
 Grid 90 mm - width = 1170 mm
 Grid 100 mm - width = 1200 mm
 Grid 120 mm - width = 1200 mm
 Grid 150 mm - width = 1200 mm
 Other grids or variable grids on request

MOUNTING:

Visible

Connection profiles or sheet material can be supplied on demand.

MATERIALS:

Aluminum (AW-5005) mill finished, normal quality or anodising quality
 Aluminum (AW-3005) coil coated on one side
 Also available in steel, stainless steel, zinc, copper, brass

THICKNESS:

1,0 mm

LENGTHS:


Up to 5.500 mm

PERFORATIONS ACCORDING TO DIN 24041:

Round holes in staggered rows Rv-1,5/3 ca. 22,68%
 Round holes in staggered rows Rv-2/3 ca. 40,31%
 Round holes in staggered rows Rv-3/4 ca. 51,02%
 Round holes in staggered rows Rv-4/6 ca. 40,31%

The concrete details and tolerances for your order can be found in our order-related release drawings.

EXAMPLE OF PROFILE CROSS SECTION:

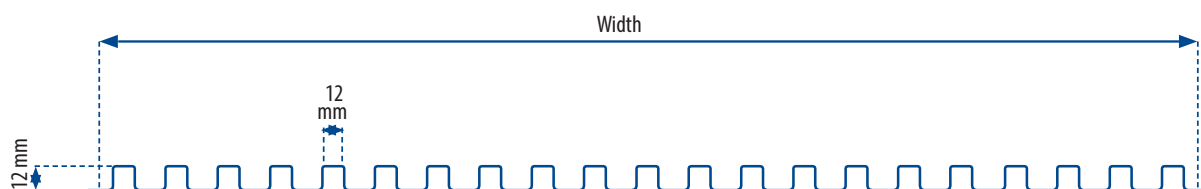

GET IN TOUCH WITH US:

MN Metall GmbH

Industrieweg 34
 D-23730 Neustadt

Tel. +49 (0) 4561/51 79-0
 Fax +49 (0) 4561/5179-35

E-Mail: info@mn-metall.de
 Internet: www.mn-metall.de

MN Metall GmbH - since 1974 the specialist for innovative sheet metal work. We give shape to your ideas!