

PRODUCT DATA SHEET

wellTEC® Profile SQ-40/20-20/20-R







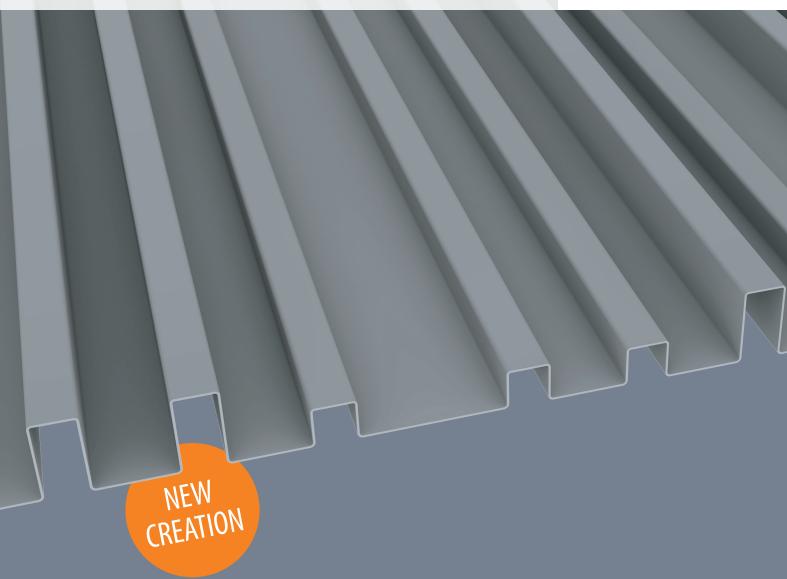

TECHNICAL DETAILS

GRIDS AND WIDTHS:

Grids and widths on request

MOUNTING:

Visible

Connection profiles or sheet material can be supplied on demand.

MATERIALS:

Aluminum (AW-5005) mill finished, normal quality or anodising quality Aluminum (AW-3005) coil coated on one side Also availiabe in steel, stainless steel, zinc, copper, brass

THICKNESSES

0,7 mm up to 1,0 mm

LENGTHS:


Up to 5.500 mm

PERFORATIONS ACCORDING TO DIN 24041:

Round holes in staggered rows Rv-1,5/3 ca. 22,68% Round holes in staggered rows Rv-2/3 ca. 40,31% Round holes in staggered rows Rv-2/3,5 ca. 29,62% Round holes in staggered rows Rv-3/7 ca. 17,86% Round holes in staggered rows Rv-5/7 ca. 46,28%

The concrete details and tolerances for your order can be found in our order-related release drawings.

EXAMPLE OF PROFILE CROSS SECTION:



GET IN TOUCH WITH US:

MN Metall GmbH

Industrieweg 34 Tel. +49 (0) 4561/51 79-0 E-Mail: info@mn-metall.de D-23730 Neustadt Fax +49 (0) 4561/5179-35 Internet: www.mn-metall.de

MN Metall GmbH - since 1974 the specialist for innovative sheet metal work. We give shape to your ideas!